



WARNING: Before attempting to install or maintain this product, assure that your weapon is unloaded and the weapon safety is in the "safe" position

MOUNTING THE SCOPE

- 1) First, remove the screws from the mount rings, and place the mount base on a secure, level surface.
- 2) Place the scope in the mount base and re-insert the screws in the mount rings, ensuring that the scope is level. Tighten opposite corners to ensure even pressure is distributed along the scope tube, to around 15 inch-lbs.
- 3) Place scope mount onto picatinny rail, tightening the thumbscrews until secure, or around 15-20 inch-lbs.

ZEROING PROCEDURE

- 1) To use bullet drop compensation, the scope must be zeroed in at 100 yards – set up your target there and fire 3 shots.
- 2) Find the center of your group, and adjust point of impact for windage and elevation. Unlock the windage and elevation turrets by pulling them up before turning. Push the caps down to lock in your adjustment.
- 3) At 100 yards, each "click" of adjustment will move the point of impact by roughly 1/2". So if your point of impact is 1" low, adjust elevation "up" 2 clicks.



You may want to start at a closer range such as 25 yards to get your shots "on paper" before final zero at 100 yards.

USING ILLUMINATION

- 1) Remove the cap from your Battery Compartment and install the included CR2032 battery, with the positive side facing outward.
- 2) Use the rotary dial to choose between 11 brightness settings, or simply turn to "0" to turn off illumination.


USING THE BDC RETICLE

The bullet drop compensation reticle is calibrated for use with 55 up to 62 grain projectiles for 5.56/.223 ammunition with a zero at 100 yards. Zero should be acquired using the tip of the chevron. Use the appropriate dot or hash mark for the range to your target to compensate for bullet drop at maximum magnification.

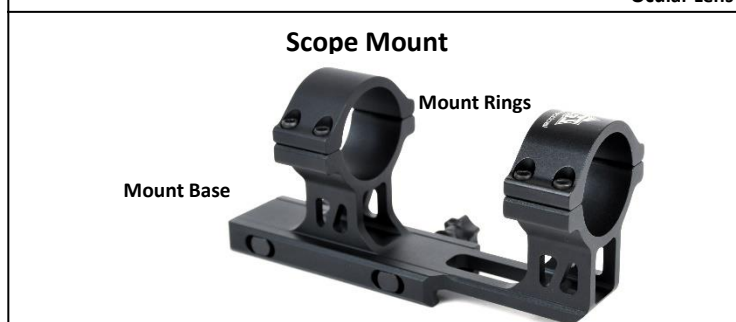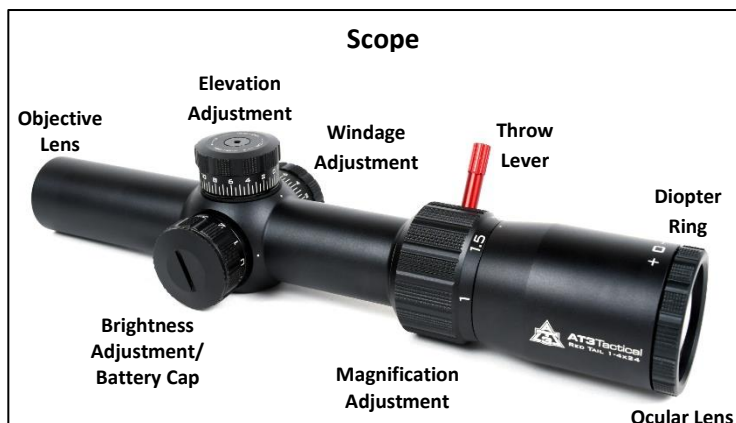

Remove the Torx head screw on the magnification ring with provided Torx wrench. Install throw lever by screwing in threads tight.

Warning: Do not remove the flat-head screw.

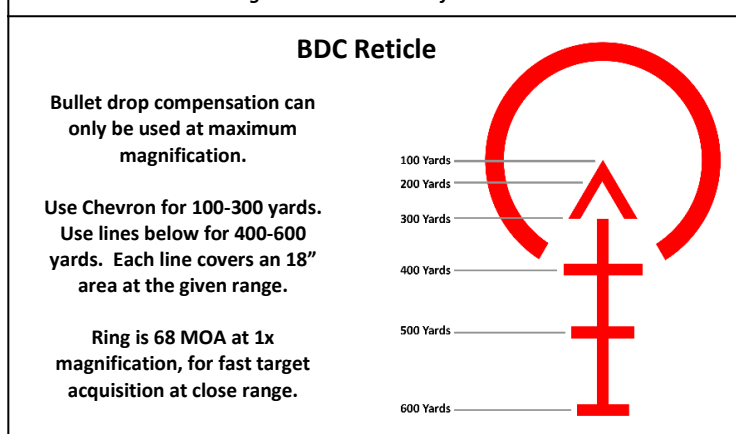

WARNING

- **INGESTION HAZARD:** This product contains a button cell or coin battery.
- **DEATH** or serious injury can occur if ingested.
- A swallowed button cell or coin battery can cause **Internal Chemical Burns** in as little as **2 hours**.
- **KEEP** new and used batteries **OUT OF REACH OF CHILDREN**.
- **Seek immediate medical attention** if a battery is suspected to be swallowed or inserted inside any part of the body.
- Immediately dispose of used batteries and keep away from children. Do NOT dispose of batteries in household trash.
- Even used batteries may cause severe injury or death.
- Call a local poison control center for treatment information.

